


# PRE-STRIPED OVERLAY

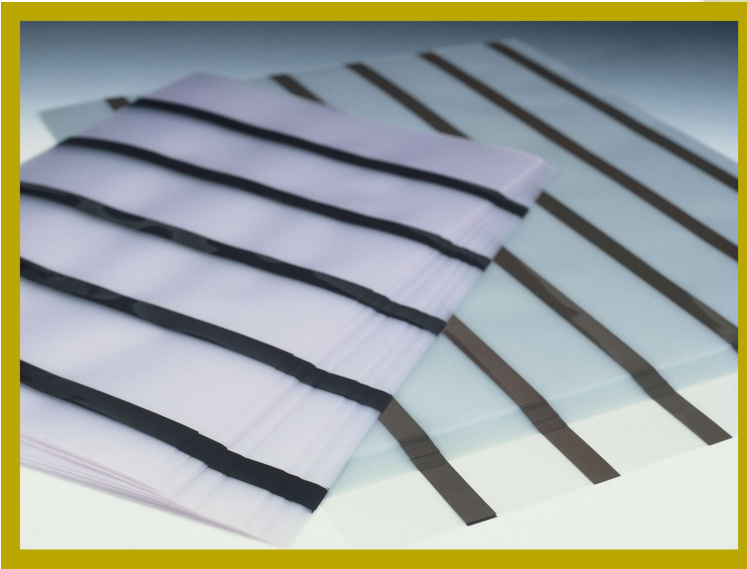

## Specification

- According to the customer's specification, high quality pre-stripped magnetic overlay is available for different lamination processes.
- Easy for the manufacturers to eliminate the production stage of applying magnetic stripes and reduce costs, improve production efficiency.
- Overlay thickness : 50, 60, 70, 80, 100, 125 and 200 microns.
- Magnetic stripe coercivity: Low Coercivity-300 Oe, Medium Coercivity-650 Oe, High Coercivity 2750 Oe & 4000 Oe.
- Magnetic tape width: 12,7 (standard) and black for Hi-Co (standard). Availability of such colors as blue, green, red, silver gold, etc. for Lo-Co and Hi-Co (2.750 Oe).
- Apply to the surface of PVC, PETG, PAPER, PET and POLYCARBONATE.
- Format application: According to the customer's request. The mobility of the stamping disks makes it viable a variety of formats and positions for the magnetic tapes.
- Raw material: conforms to I.S.O. and other international quality standards.

**-SMARTLAYER 3-**

C/ Riera dels Frares, nº 10, 3ª planta  
08907- L'Hospitalet de Llobregat Barcelona - SPAIN  
Tel. +34 93 264 10 47 Fax +34 93 263 57 12  
info@smartlayer3.com www.smartlayer3.com